




- ° Single Inlet / Single fan or multiple fans
- ° Multiple filter options

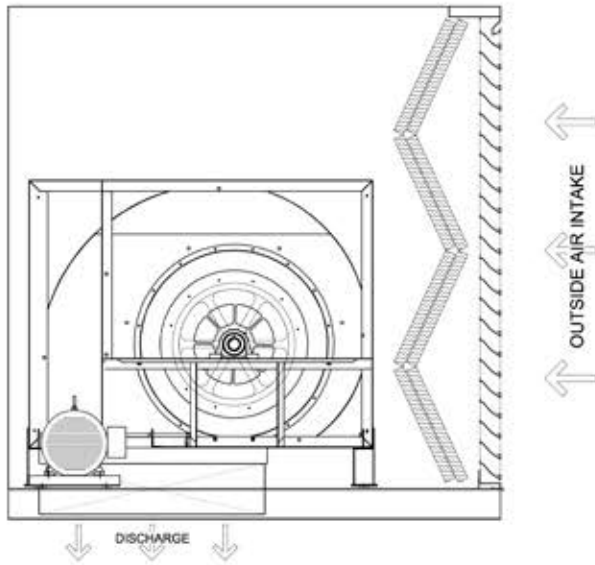

- ° Single Inlet/Single Fan or multiple fans
- ° Multiple filter options

### Industrial Filtration Units with capacities of 6,000 CFM to 150,000 CFM and up to 3.5" ESP or higher if required

#### Filtration Options:

- ° Perfect Pleated : MERV8 , MERV13, MERV15 / CARBON
- ° Aluminium
- ° DRIPAK (Bag Filters)
- ° Hepa
- ° Astro Cell
- ° Molecular Filtration
- ° Auto Airmat

#### Benefits:

- ° 1.5" -2" or double isolated wall or single wall construction
- ° Galvanized, aluminum, stainless steel
- ° 6,000 - 150,000 CFM and above
- ° Forward curve, airfoil, backward inclined wheels or plenum fan.
- ° Multiple filter sections

#### Accessories:

- ° Isolators
- ° Control Panel
- ° Pressure Gauge

#### Applications

- ° Aircraft hangars
- ° Clean room M.U.A.
- ° Data Centers
- ° Food processing plants
- ° Gymnasiums
- ° Hospitals
- ° Kitchens
- ° Make up air requirement
- ° Manufacturing facilities
- ° Military bases
- ° Mining industry
- ° Municipalities
- ° Prisons
- ° Process cooling
- ° Schools
- ° Textile industries
- ° Turbine inlet cooling
- ° Waste water treatment facility
- ° Warehouses

#### Resources Available for this product

- ° Catalog by mail